


The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com
Part Number HM212049, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

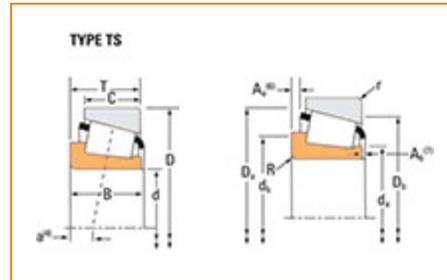

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Cone Part Number	HM212049
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	465000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	121000 N

Dimensions


d - Cone Bore 66.675 mm

B - Cone Width	38.354 mm
-----------------------	-----------

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	3.560 mm
--	----------

da - Cone Frontface Backing Diameter	75.5 mm
---	---------

db - Cone Backface Backing Diameter	82.0 mm
--	---------

Ab - Cage-Cone Frontface Clearance	3.8 mm
---	--------

Aa - Cage-Cone Backface Clearance	1.8 mm
--	--------

a - Effective Center Location⁴	-10.9 mm
--	----------

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	69200 N
---	---------

C1 - Dynamic Radial Rating (1 million revolutions)⁶	267000 N
---	----------

C0 - Static Radial Rating	279000 N
----------------------------------	----------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	40000 N
---	---------

Factors

K - Factor⁸	1.73
-------------------------------	------

G1 - Heat Generation Factor (Roller-Raceway)	92.2
G2 - Heat Generation Factor (Rib-Roller End)	18.1
Cg - Geometry Factor⁹	0.0759

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a3l.

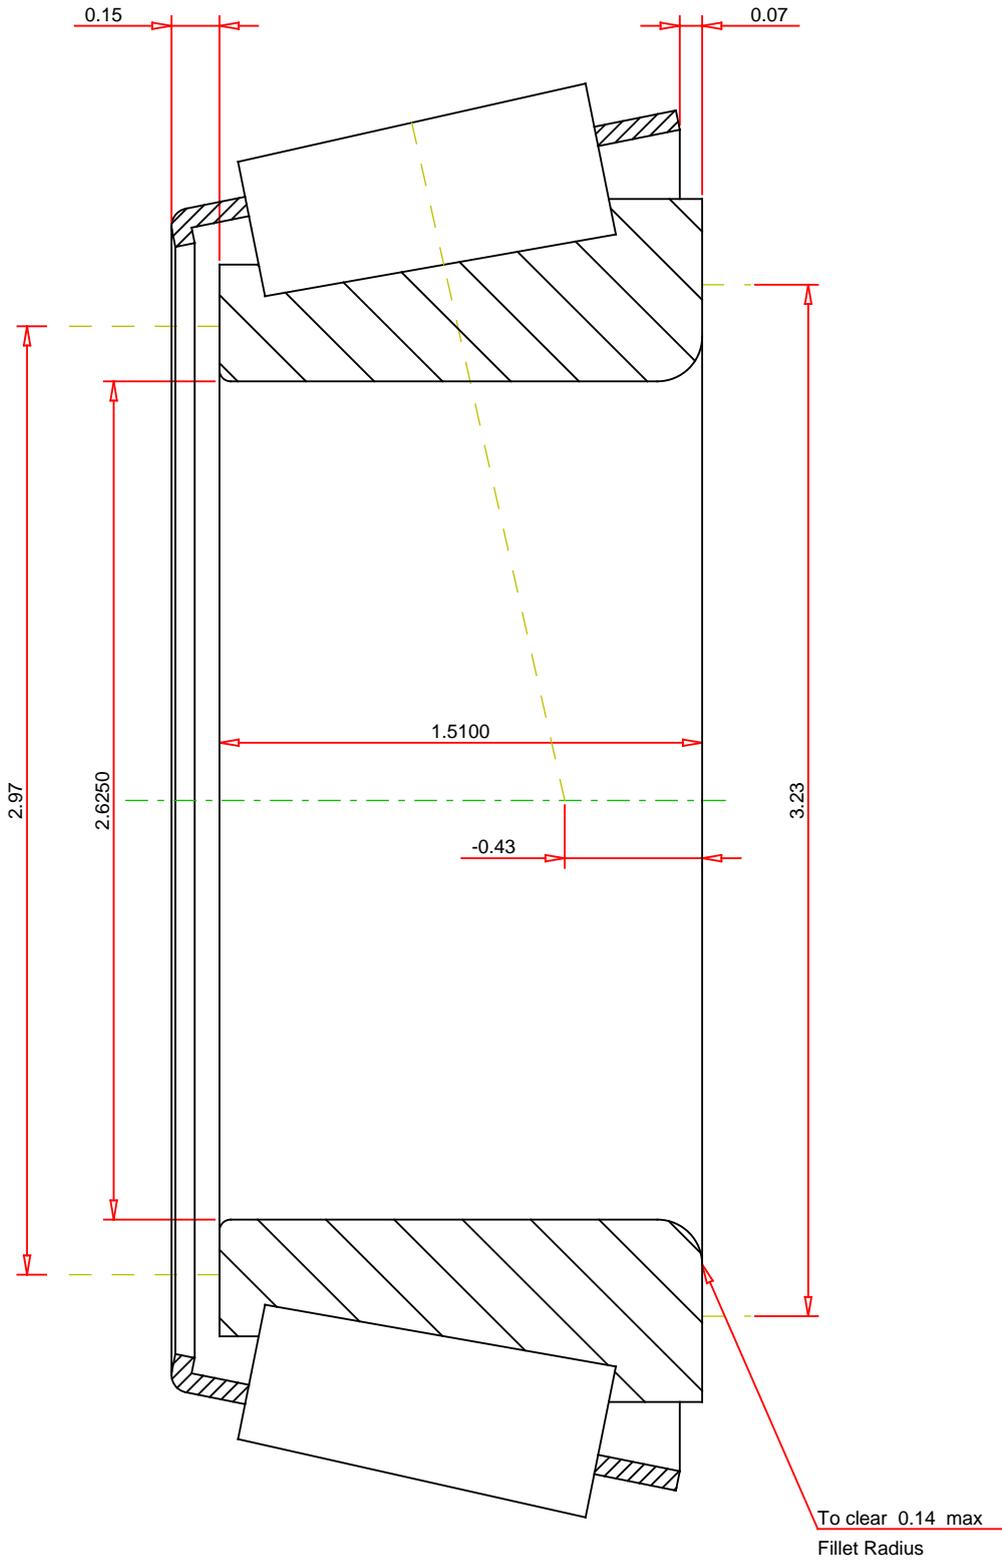

IMPERIAL UNITS

Number of Rollers Per Row

17

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

HM212049

Tapered Roller Bearings - Single Cones - Imperial

K Factor	1.73
Dynamic Radial Rating - C90	69200 lbf
Dynamic Thrust Rating - Ca90	40000 lbf
Dynamic Radial Rating - C1	267000 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY